




Advanced to a Higher Quality and Data Rate!!

Smart LDV III

Model 8743/8743-S

Smart LDV III

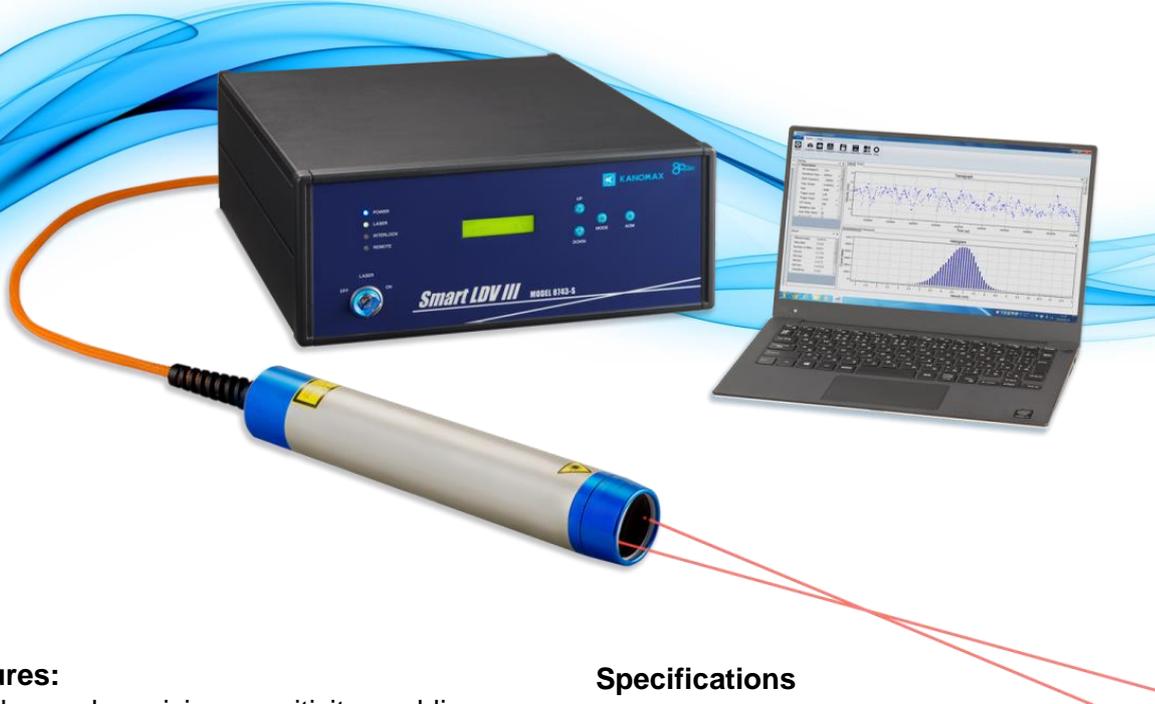

Features:

- Enhanced receiving sensitivity enabling high data-rate measurement
- Up to 60,000 velocity data/sec.
- High-speed data transfer by USB3.0
- Probe designed as all-in-one, no alignment necessary


Applications:

- Aerodynamic and hydraulic property measurement
- Measurement requiring high time-resolution
- Comparison with CFD
- PIV accuracy tests

Specifications

| | |
|----------------------------|--|
| Flow velocity range | -40m/s~260m/s (f=400mm, Model 8743-S) |
| Optical System | |
| Laser | LD $\lambda=660\text{nm}$, 60mW |
| Focal length | 150mm, 200mm, 250mm, 300mm, 350mm, 400mm |
| Measurement volume size | 0.13mm x 1.3mm (f=200mm) |
| Measurement method | Back scatter / Forward scatter(Optional) |
| Probe size | Dia. 61mm x 345mm |
| Shift frequency | Model 8743 : Without Frequency Shifter Model 8743-S : 0.01 – 10MHz |
| Power supply | AC100 – 240V |
| Signal Processor | |
| Signal processing | 8bit FFT (512,256,128point) |
| Frequency band | 1kHz~40MHz (8 ranges) |
| Max data rate | 60,000 speed data/sec* |
| Validation | Burst spectrum ratio |
| Interface | USB3.0 |
| Software | |
| Max. number of data | 100,000 |
| Real time monitor | Burst waveform Burst spectrum Velocity histogram |
| Analysis function | Mean flow velocity, Turbulent intensity, Skewness factor, Flatness factor Velocity histogram, Time-series display |
| Data output | CSV format |
| Supported Operating System | Windows 7 / 8 / 10 (64bit only) Japanese / English |

*Depending on measurement condition

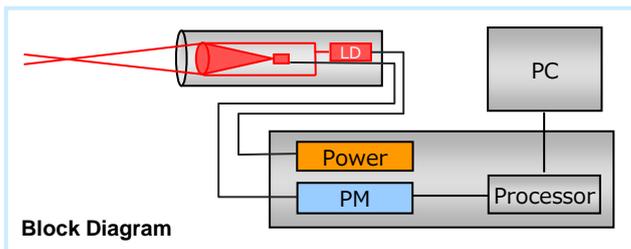

Block Diagram

Kanomax JAPAN, INC.

Fluid Research Measurement Solutions Division

2-1 Shimizu Suita City
Osaka 565-0805 JAPAN
TEL: 81-6-6877-8679
E-mail: fluids@kanomax.co.jp
<http://www.kanomax.co.jp>

Information, data and specifications in this brochure are subject to change without notice.



Options

Traverse System

Automated Traverse System for positioning the optical system


Easy measurements without the hassle of changing the measurement location manually.

- Automatic measurements from the LDV software
- Moves between each measurement point with high positioning accuracy
- Operable also in manual mode

| | |
|----------------------|---|
| Moving axis | X, Y, Z axis * |
| Stroke | 500 mm * |
| Positioning accuracy | ±0.02 mm (X axis) ** |
| Drive system | Stepping motor |
| Controller | LDV Software (traverse-compatible version) |

* Reference examples

** Positioning accuracy for Y and Z axis varies depending on the load

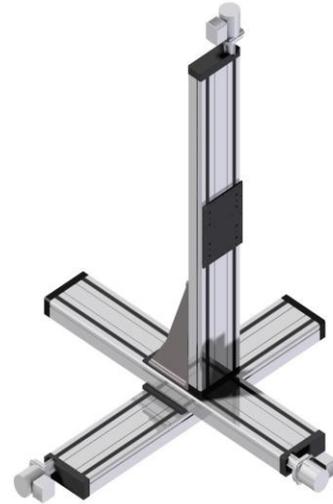

Corner Cube Mirror


Corner cube Mirror for better SNR of data

Designed to be placed at the opposite side of the laser to reflect strong front scattering light to the optical receiver in order to improve the signal-to-noise ratio.

| | |
|--------------------|--|
| Focal length | 200 mm, 250 mm, 300 mm, 350 mm, 400 mm |
| Effective diameter | Dia. 50 mm |

Application Example: Cylinder Wake Measurement

Instrument Set-up

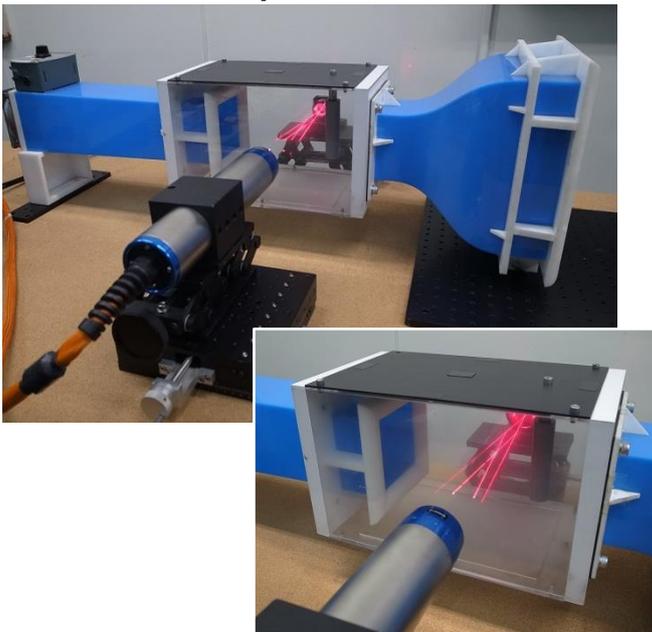

Measurement Condition

| | |
|------------------------|---------------------|
| Tracer particle: | Approx. dia. 5.0 μm |
| Focal length of probe: | 200 mm |
| Frequency shifter: | Available |
| Measurement point: | Cylinder wake |

Result

