

Specifications of Main Unit		
Product		Multi-Channel Anemomaster
Model		Model 1580-00
Number of channels		Up to 12 channels
Communication Function	Bwtween PC	USB Micro-B
	Between Probe	Serial communication (standard cable)
	Between Probe	Serial communication (connector)
Power Supply		DC12 to 24V (Select either one of 3 options below) 1) Connection with other unit, 2) AC adaptor (90W), 3) DC power cable
Power Consumption		Up to 50W
Operating Environment		5~40℃、0~85%RH(No Condensation)
Storage Environment		-10~60℃、0~90%RH (No Condensation)
Dimensions		W220mm × D130mm × H40mm
Weight		0.6 kg
Standard Accessories		AC Adapter (90W)、Software (CD)、Operation manual、USB cable、Rubber cap
Warranty		1 year

Product			Analog Unit
Model			Model 1592-00
Number of channels			12ch
Communication Function		Between units	Serial communication (connector)
Analog Output	Voltage output	Range	0 ~ 5 V
		Output resistance	1 kΩ
	Current output	Range	4 ~ 20 mA
		Load resistance	250 Ω
Power Supply			DC12 to 24V (Select either one of 3 options below) 1) Connection with other unit, 2) AC adaptor (90W), 3) DC power cable
Power Consumption			10W
Operating Environment			5~40°C、0~85%RH(No Condensation)
Storage Environment			-10~60°C、0~90%RH (No Condensation)
Size			W220mm × D130mm × H40mm
Weight			0.5 kg
Standard Aecessories			Setup guide、Connecting clips (2pcs)、Rubber cap (2pcs)、Ternimal block (3pcs)
Warranty			1 year

Specification of Probe																	
Model Number	Measurement Target	Directivity	Air Velocity			Wind Temperature		Humidity		Operating Temperature	Temperature compensation sensor						
			Measurement Range	Measurement Accuracy	Responsivity	Measurement Range	Measurement Accuracy	Measurement Range	Measurement Accuracy								
0972-00	Wind	Yes	0.01~50.0m/s	The larger of ± 2% or ± 0.02 m/s of the displayed value	1 second	—	—	—	—	0-100℃	± 5% of displayed value at 0-100 ℃						
0973-00			0.01~25.0m/s														
0975-00																	
0975-09		Speed	0.01~50.0m/s	The larger of ± 3% or ± 0.02 m / s of the displayed value	3 second					—	—	—	—	0-120℃	± 5% of displayed value at 0-120 ℃		
0975-10																	
0976-03														0.01~30.0m/s	The larger of ± 2% or ± 0.02 m/s of the displayed value	0-100℃	± 5% of displayed value at 0-100 ℃
0976-04																	
0976-07																	
0976-13		No	0.01~30.0m/s	The larger of ± 2% or ± 0.02 m/s of the displayed value	3 second					0~120℃	±0.5%	5~95%RH	5~80%RH:3%RH 80~90%RH:5%RH	0-60℃	± 5% of displayed value at 0-60 ℃		
0976-14																	
0976-17																	
0976-05																	
0976-15	Air Velocity and Temperature	0.01~25.0m/s	The larger of ± 3% or ± 0.02 m/s of the displayed value	3 second	0~100℃	±0.5%	5~95%RH	5~80%RH:3%RH 80~90%RH:5%RH	0-120℃	± 5% of displayed value at 0-120 ℃							
0975-21																	
0975-31	Air Velocity, Temperature and Humidity	0.01~25.0m/s	The larger of ± 2% or ± 0.02 m/s of the displayed value	3 second	0~60℃	±0.5%	5~95%RH	5~80%RH:3%RH 80~90%RH:5%RH	0-60℃	± 5% of displayed value at 0-60 ℃							

Responsivity: Indicated value gets 0.9m/s or more than 0.9m/s to "air velocity 1m/s" on the certain temperature condition



KANOMAX JAPAN,INC.

2-1,Shimizu,Suita-shi Osaka, 565-0805
 TEL : 81-6-6877-0183
 FAX : 81-6-6877-5570
 E-mail : sales@kanomax.co.jp
 URL : www.kanomax.co.jp
 www.kanomax-usa.com

●Distributed by :

E1580-1E



Multi-Channel Anemomaster

MODEL 1580



12-channel multi-Channel Anemomaster


Compact and light weight

- 15 types of compatible probes for various applications
- The smallest class probe in the industry
- High heat resistance enables precise measurement even in tough environments
- High portability of the main body makes it easy to use in vehicles.
- Improved probe response and accuracy, micro air velocity limit of 0.01 m/s

Easy and simple configuration that can support up to 12 channels

World's highest level of accuracy and responsiveness in the full air velocity range, including the fine velocity range
Multi-channel measurement with up to 12 channels is realized with the industry's smallest level of miniature probes, high heat resistance and temperature measurement.
Pursuing ease of use to achieve easy multi-point measurement

System Configuration Example

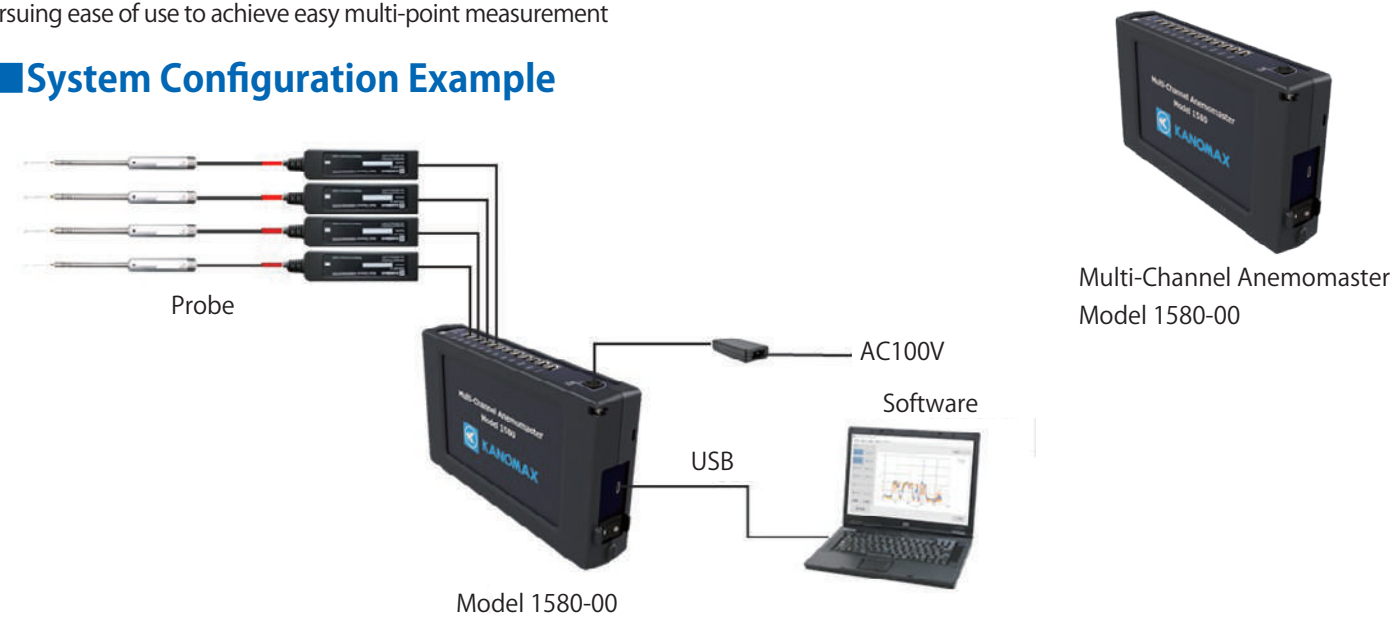


Supports analog output

By connecting an optional analog unit, it is possible to convert the measurement data into an analog signal and output it. Each analog unit has 12 channels, and it is possible to select electric current or voltage for each channel. A maximum of 3 units can be added to 36 channels with one main unit, making it ideal for data collection using a data logger.




Software

This product comes with a Windows version of the measurement software. Simultaneous measurement of all channels of air velocity, temperature and humidity, and real-time graph display
Measurement data is saved in text format and can be easily imported into table measurement software such as Excel.
It can be measured from a PC via the USB communication interface.

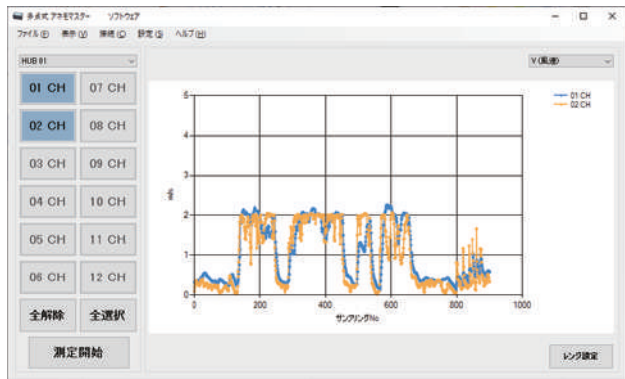

Application Example

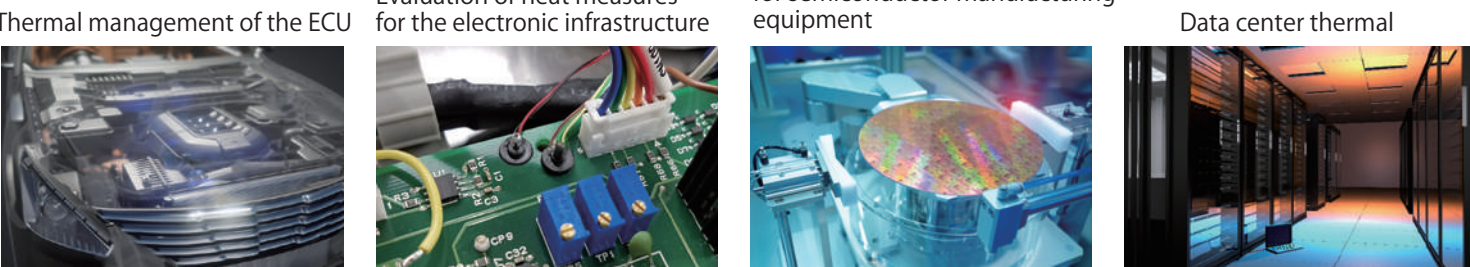

Air velocity range of compatibility probes to meet a many different type of customer needs

15 Types of Probes Are Available

Model 0972-00
V : 0.01 ~ 50.0 m/s

Model 0973-00
V : 0.01 ~ 50.0 m/s

Model 0975-00
V : 0.01 ~ 25.0 m/s

Model 0975-09 / 21
V : 0.01 ~ 50.0 m/s (09)
V : 0.01 ~ 25.0 m/s (21)
T : 0 ~ 100 °C (21)

Model 0975-10
V : 0.01 ~ 50.0 m/s


Model 0976-03 / 13
V : 0.01 ~ 30.0 m/s
Operating temperature : 0 ~ 120 °C (03)
0 ~ 100 °C (13)

Model 0976-04 / 14
V : 0.01 ~ 30.0 m/s
Operating temperature : 0 ~ 120 °C (04)
0 ~ 100 °C (14)

Model 0975-31
V : 0.01 ~ 25.0 m/s
T : 0 ~ 60 °C
H : 5 ~ 95 %RH

Model 0976-05 / 15 0976-07 / 17
V : 0.01 ~ 30.0 m/s
T : 0 ~ 120 °C (05)
0 ~ 100 °C (15)
Operating temperature : 0 ~ 120 °C (05 / 07)
0 ~ 100 °C (15 / 17)
Probe height : 5.8 mm

Probe Dimensions

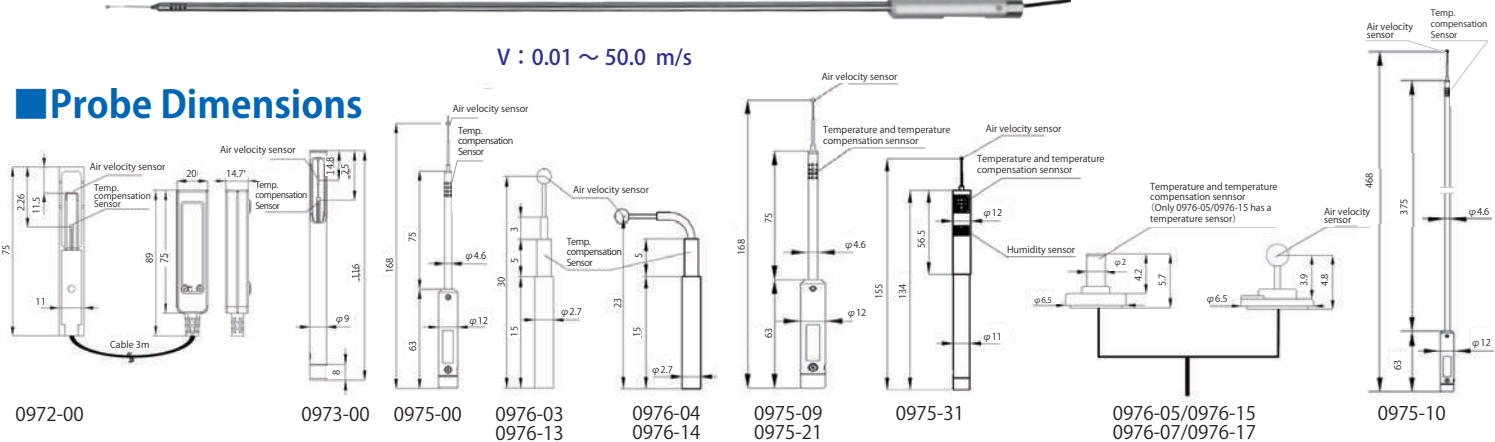

Available Accessories

AC adapter

Standard cable

DC power connection cable

Probe fixing jig

Double-coated tape for 0976

Model 1580-10
Output power : 90W
Input : AC100-240V
50/60Hz, 1.5A

Model	Length
1580-30	0.5m
1580-31	2m
1580-32	5m
1580-33	10m
1580-34	20m
1580-35	40m

Model 1580-37
Length : 2m
Supply voltage : 12 ~ 24V
Power capacity : Maximum 6.25A
(Maximum about 150W)

Model 1580-90
Compatible probe : 0976-03/04 0976-13/14
Upper-temperature limit : 150°C
Quantity : 20 pairs / 1 pack

Model 1580-92
Compatible probe : 0976-05/07 0976-15/17
Size : φ5.5×t0.3mm
Upper-temperature limit : 120°C
Quantity : 200 pairs / 1 pack

Probe fixing example

Example of probe with the double-sided tape